


BOX SHAPED NET FITTING INSTRUCTIONS

FOR OVAL SOCKETED STADIUM ALUMINIUM GOALS

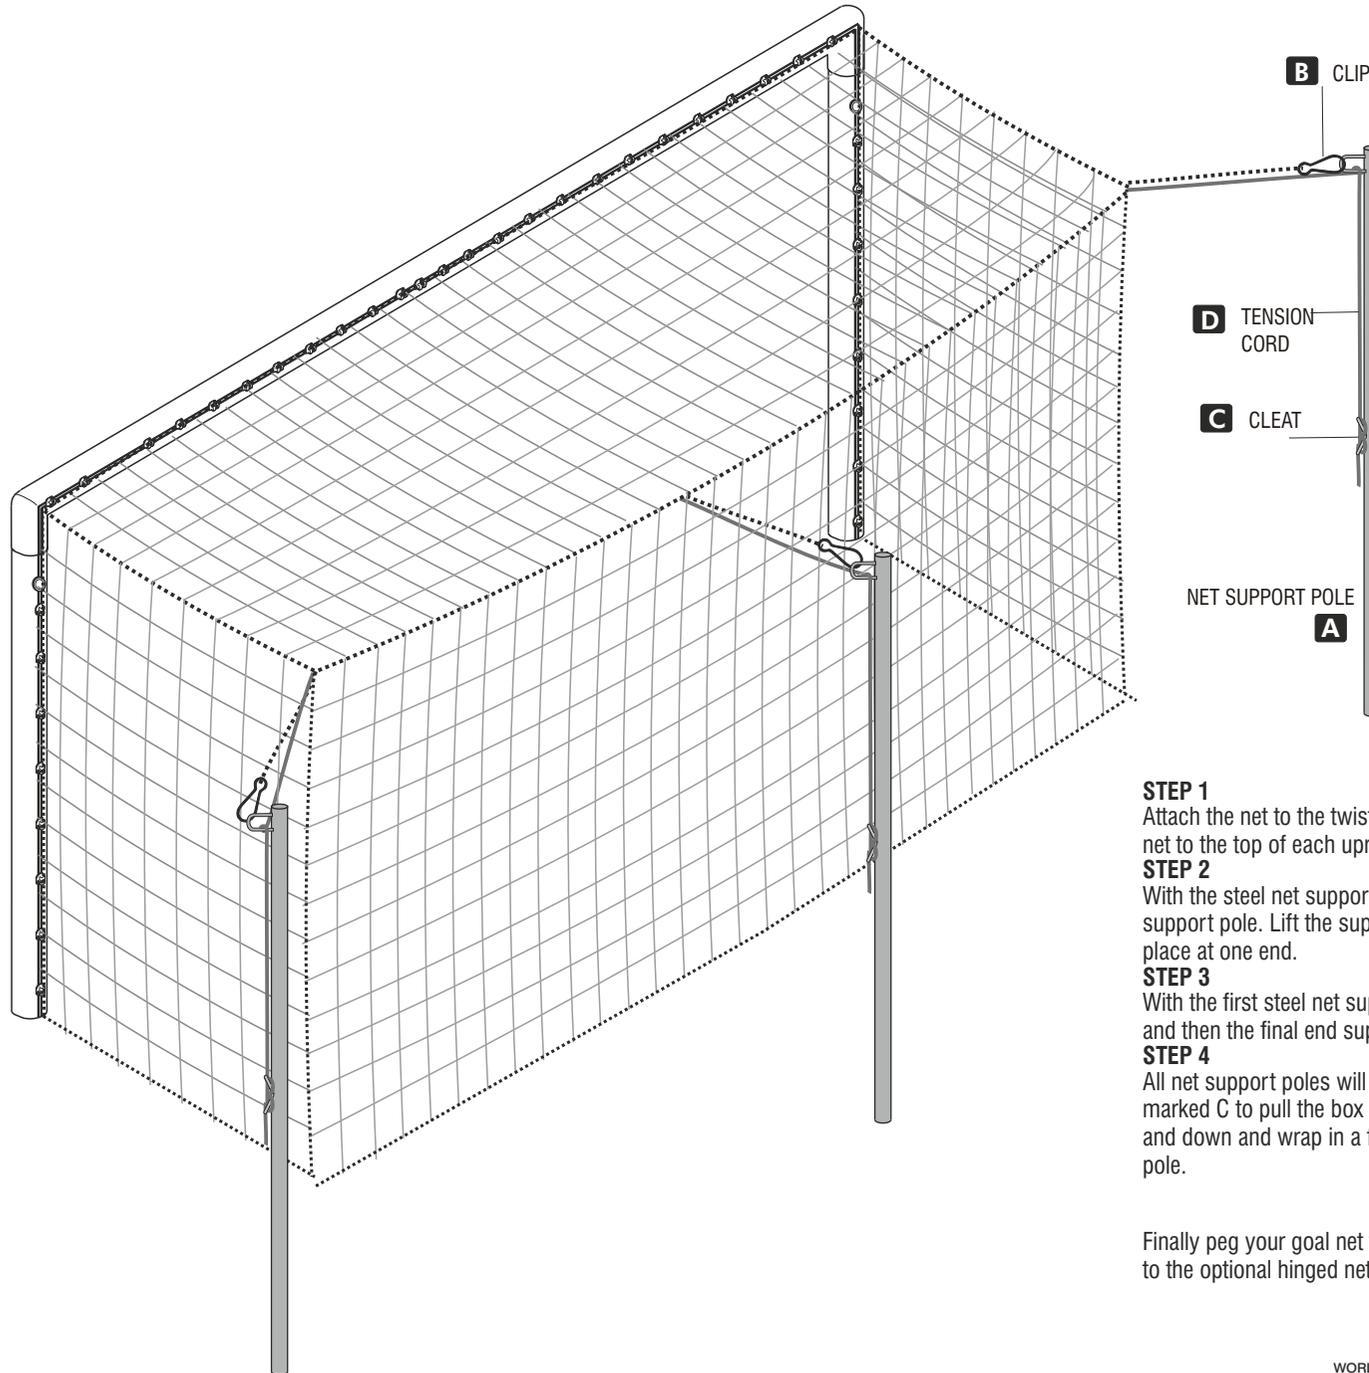

STEP 1

Attach the net to the twist and lock net fixings on the crossbar and uprights. Fit the corners of the net to the top of each upright first then clip the net onto all other net fixings.

STEP 2

With the steel net support pole laid flat on the floor attach the clip(B) to the end/top of the net support pole. Lift the support pole in the air and insert into the ground socket so that one pole is in place at one end.

STEP 3

With the first steel net support pole(A) in place, repeat this step and fit the middle support pole and then the final end support pole.


STEP 4

All net support poles will be in place now with the net hanging loosely. Now use the tension cord marked C to pull the box nets tightly to create a tensioned straight box shape. Pull the cord back and down and wrap in a figure of eight onto the cleat to hold in place. Repeat this step on each pole.

Finally peg your goal net to the ground if the goal is being used on grass or alternatively fit the net to the optional hinged net retainer - see separate fitting instructions.

BOX SHAPED NET FITTING INSTRUCTIONS

FOR OVAL SOCKETED STADIUM ALUMINIUM GOALS
OPTIONAL SETUP FOR LIGHTWEIGHT
MACHINE MADE NETS

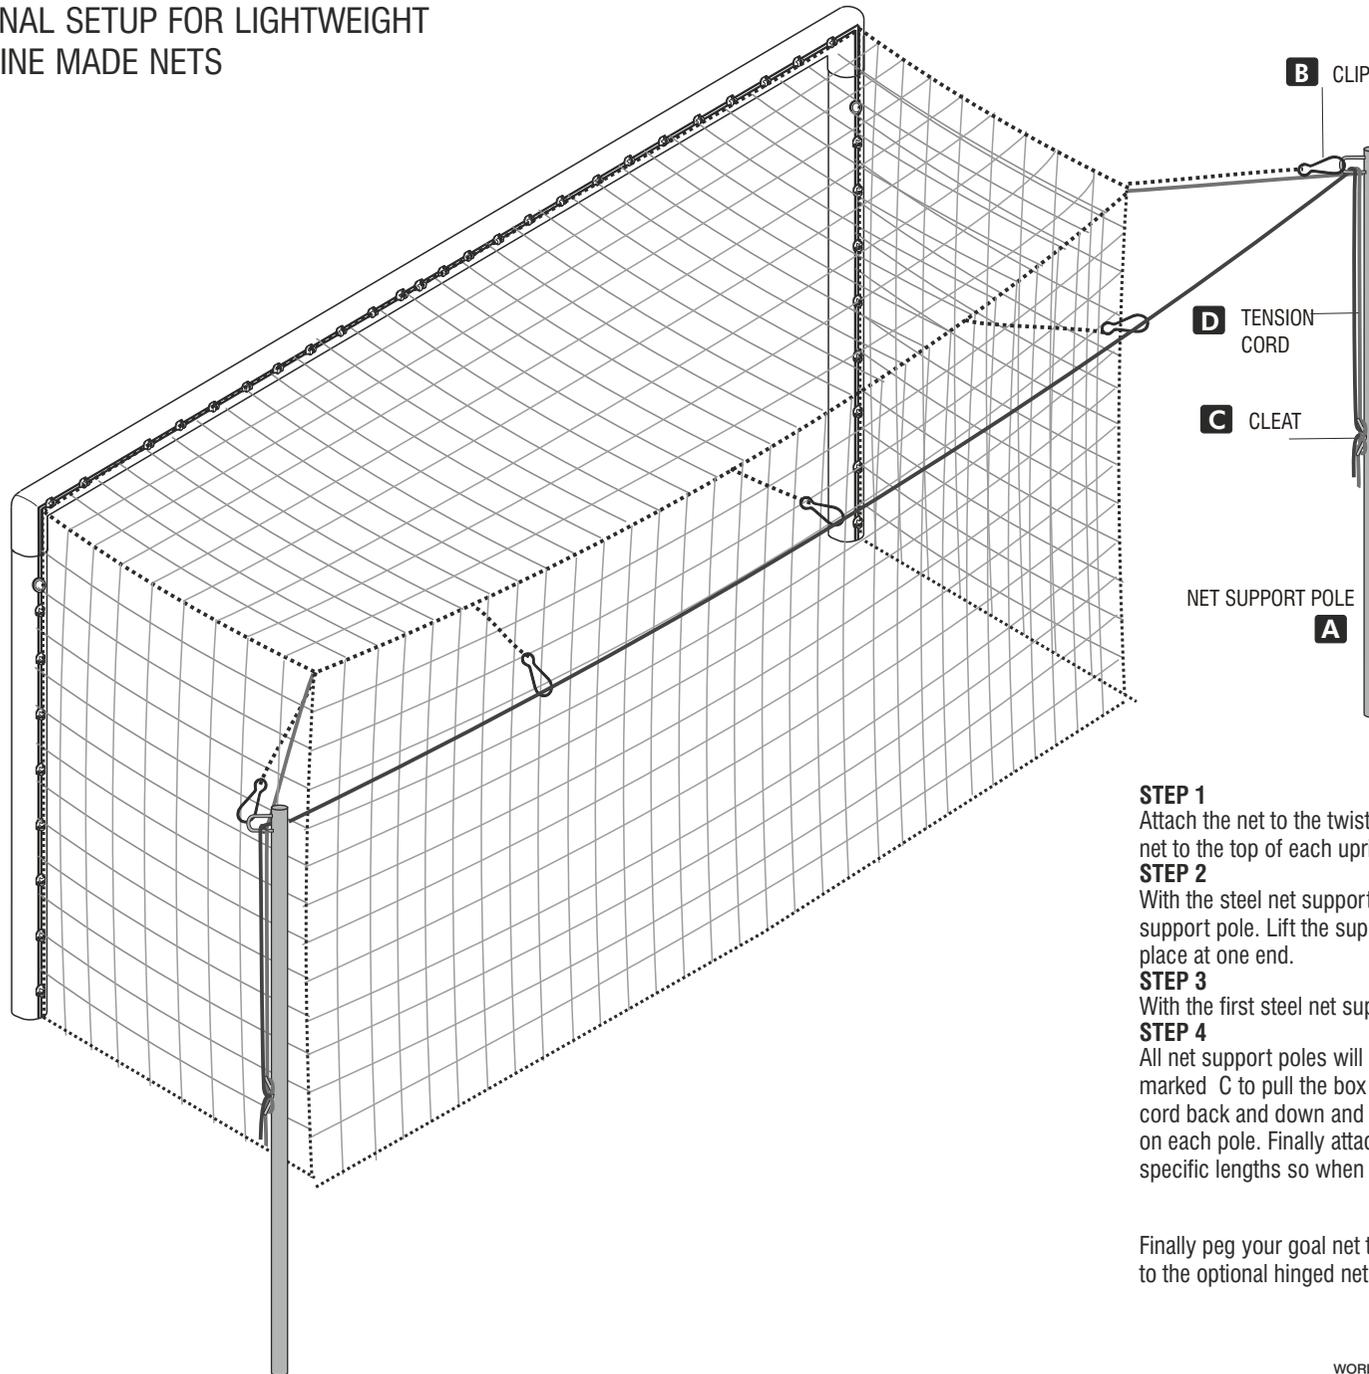

STEP 1

Attach the net to the twist and lock net fixings on the crossbar and uprights. Fit the corners of the net to the top of each upright first then clip the net onto all other net fixings.

STEP 2

With the steel net support pole laid flat on the floor attach the clip(B) to the end/top of the net support pole. Lift the support pole in the air and insert into the ground socket so that one pole is in place at one end.

STEP 3

With the first steel net support pole(A) in place, repeat this step and fit the next support.

STEP 4

All net support poles will be in place now with the net hanging loosely. Now use the tension cord marked C to pull the box nets tightly at each end to create a tensioned straight box shape Pull the cord back and down and wrap in a figure of eight onto the cleat to hold in place. Repeat this step on each pole. Finally attach the remain clips (B) between the posts. These cords will need to be specific lengths so when clipped on they are sufficiently tensioned.

Finally peg your goal net to the ground if the goal is being used on grass or alternatively fit the net to the optional hinged net retainer - see separate fitting instructions.