








COMPONENTS

A	NET TIE	x28	
B	SMALL QUICK RELEASE BUTTON	x4	
C	STRAIGHT CONNECTOR	x1	
D	STANCHION CONNECTOR	x2	
E	ARROW HEAD NET FIXING with attached LOCKING PIN	x6	
NH	GROUND FRAME FIXING	x6	
NET	GOAL NET 16' x 7'	x1	

12' X 6' EXTENSION KIT (12' x 6' MS to 16' x 7' MS)


(12' x 6') - One section crossbar.

FITTING INSTRUCTION

tsaGoal
www.itsagoal.net







SPARE PARTS TEL: 0114 24 34 200

NET TIE PLACEMENT



NET TIES TO BACKBAR & SIDEBAR SECTIONS

POST SECTIONS

F	CROSSBAR SECTION 1205mm LONG - 68mm Diameter	x1	
G	BACKBAR SECTION 1205mm LONG - 68mm Diameter	x1	
H	UPRIGHT SECTION 305mm LONG - 68mm Diameter	x2	
I	SIDEBAR SECTION 366mm LONG - 68mm Diameter	x2	
J	TOP STANCHION TUBE 630mm LONG - 40mm Diameter	x2	
K	UPPER BACK STANCHION TUBE 336mm LONG - 40mm Diameter	x2	

DO NOT THROW THE LOCKING PINS AWAY




NET TIES




ENSURE THAT YOU TIGHTEN THE NET TIE AROUND THE NET-CORD (no more than 340mm apart).


Ensure the teeth of the Net tie are facing you (see step 1). Loop the Net Tie around the Net Cord and slide the end into the horizontal slot and pull tight onto Net Cord (see step 1-2).



The vertical slot of the Net Tie is used to secure the net to the post. Loop the Net Tie around the post and insert through vertical slot and twist to lock. (steps 3 - 5).



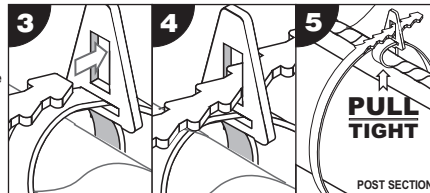


Any excess Net Tie can be looped back into the vertical slot. This will also secure the net tie in a fixed position (steps 6 - 8). If Net Ties are to be removed after use then do not loop back into vertical slot.

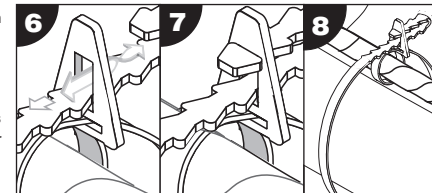


DO NOT THROW THE LOCKING PINS AWAY

Insert ground frame net fixings in the sidebar sections and backbar sections.

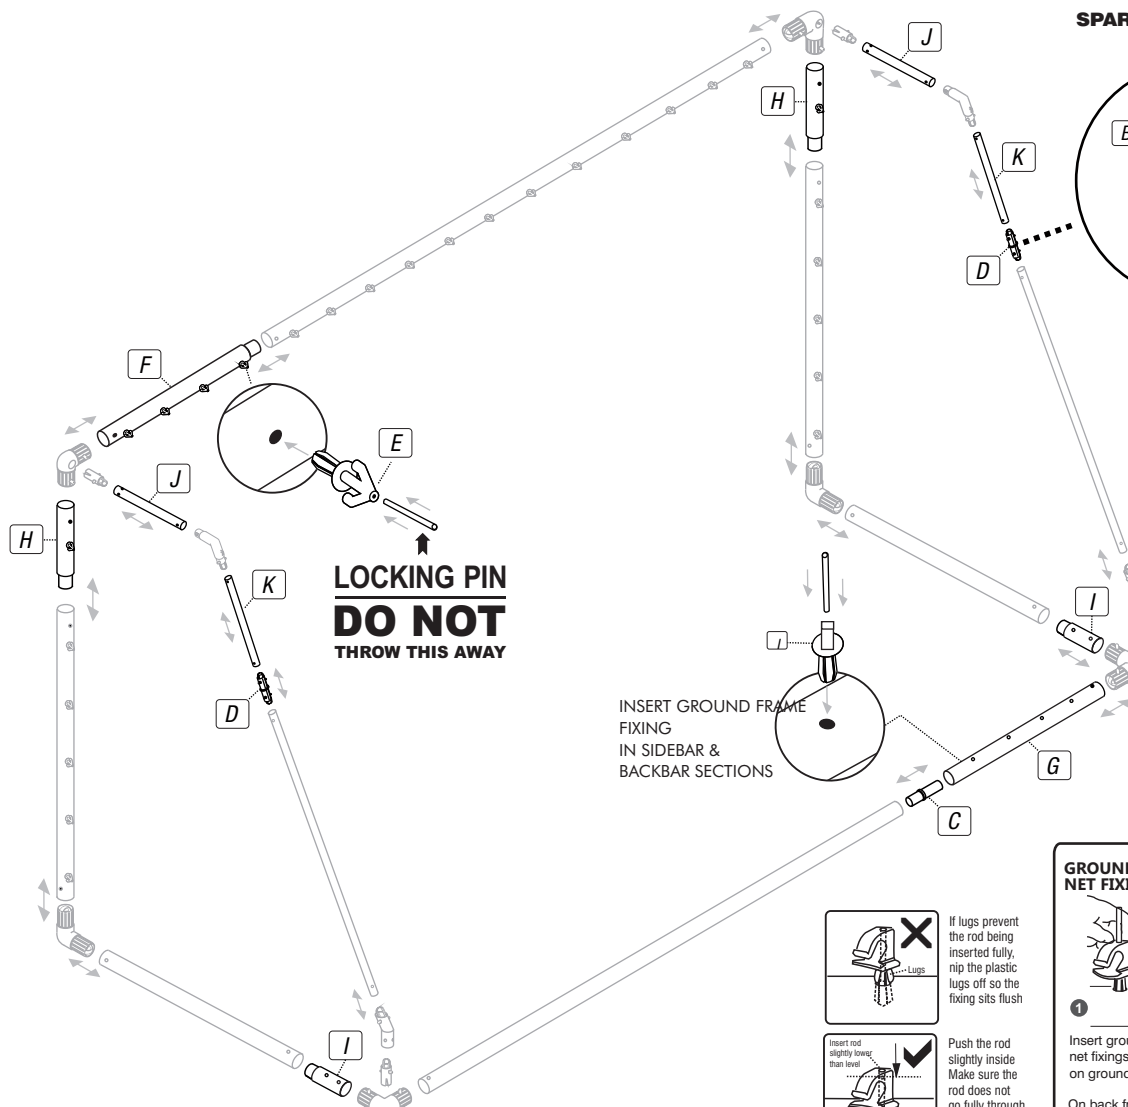

If lugs prevent the rod being inserted fully, nip the plastic lugs off so the fixing sits flush




Push the rod slightly inside. Make sure the rod does not go fully through and fall out or the fixing will not lock

GROUND FRAME NET FIXING



Insert ground frame net fixings into holes on ground frame

DO NOT THROW THE PINS AWAY



Push locking pin down centre. Ensure locking pin is inserted fully

On back frame fix all the same way with opening facing inwards. On side frames along the ground fit alternate